
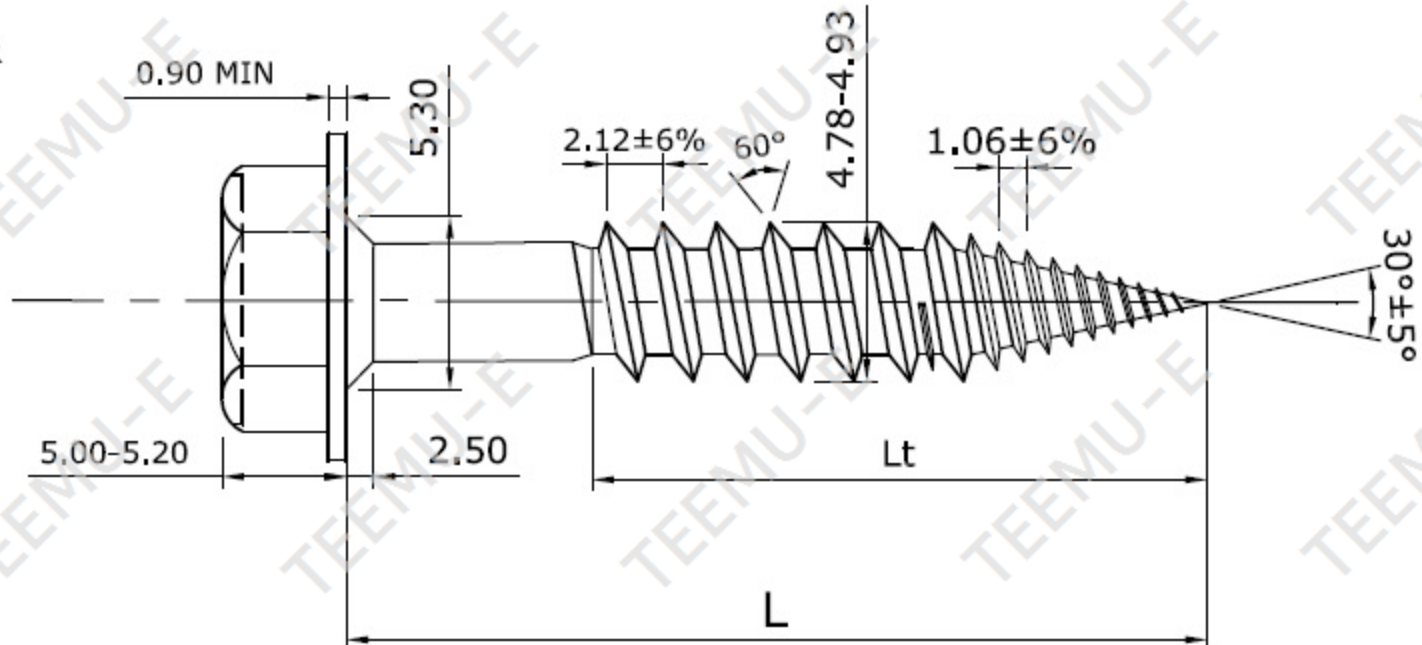


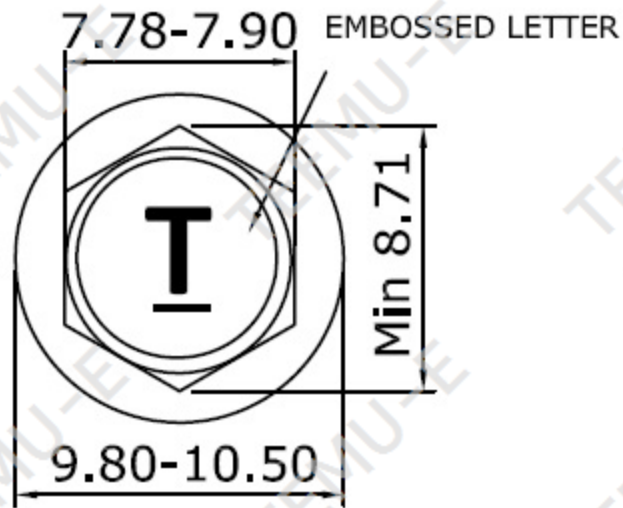

| LENGTH       | TOLERANCE | THREAD LENGTH |
|--------------|-----------|---------------|
| UP to 25mm   | ±0.80mm   | Full THREAD   |
| 25mm ~ 50mm  | ±1.20mm   | Full THREAD   |
| 65mm ~ 105mm | ±1.20mm   | 50.80mm       |

MATERIAL : C1022  
 Coating: 1000 HRS SILVER RUSPERT+15 CIRCLES  
 CASE HARDNESS : MIN 550 HV  
 CORE HARD HV 240~425  
 CASE DEPTH 0.10~0.23 mm  
 TORQUE : MIN 64.5 KG-CM